

## X1 Online TIJ inkjet printer

### 1. Printer Model: X1

### 2. Printer Picture



### 3. Printer Introduction

1. Original imported quick-drying ink box, instant printing, quick-drying, detachable and replaceable, clear printing
2. 4.5 inch high definition display screen and high precision capacitive touch screen.
3. It can support bluetooth 4.0/ Wi-Fi connection, system firmware can be upgraded remotely.
4. It can print deformable bar code/ QR code/ text.
5. Large-caliber inkjet nozzle, which can be sprayed evenly on a flat object. The highest printing height is 12.7mm.

### 4. Technical Parameter

# BANGLEMARK

Wuhan BangleMark Technology Co., Ltd.

**Add:** Floor 5, Building 5, Chaoshangcheng Community, Panlongcheng, Huangpi District, Wuhan, China


Selectable Languages	English, Chinese, Korea, Arabic, Spanish, Turkish, French, German, Portuguese
Operation Menu	Digital Menu Selection (DMS) for easy operation
Control Panel	touch-screen (can connect wireless mouse, can also edit information through the computer)
Printing direction	adjusted within 360 degree, meet all kinds of production needs
Plug-n-print Design	Hewlett-Packard TIJ 2.5 printing technology
Printable Images	Alphanumeric, Logo, Expiry Date, Date / Time, Shift Code, Lot-box Code and Barcode, Counter
Printable Lines&Heights	1, 2, 3, 4 lines. Total line height is limited to 12.7mm (0.5")
Character type	high-definition printing character, dot matrix font, Simplified, Traditional Chinese and English
Heights	2.7mm, 3.6mm, 5.5mm, 8mm, 10mm, 12.7mm ( 0.11", 0.14", 0.22", 0.31", 0.39", 0.5" )
Print Speed	70 meters / minute at 600DPI horizontal resolution
Print Distance	2-5mm (from nozzle to print material)
Ink color	black, white, red, blue, yellow, green, invisible
Ink volume	42ml (usually can print 800,000 characters)
External interface	USB, Photoelectric interface, RS232, Bluetooth, Wifi, network interface
Flow Serial number	Variable sequence number from one to eight
Storage	Store up to 1000 messages with SD card
Dimension(H/W/D)	2128*86*42(mm) (controller size), 100*100*34mm (print head size)
Weight	Controller 0.45KG, Print head 0.25KG
Power Supply	AC 100~240V input, DC 16.8V/2A output
Operating Temperature Range	temperature 0-45 °C (20-30 °C for the best), humidity 40-60%Rh
Printing material	board, carton, stone, pipe, cable, metal, plastic product, electronic, the fiber board, light steel keel, aluminum foil, etc.

## 5. More Details

# BANGLEMARK

Wuhan BangleMark Technology Co., Ltd.

Add: Floor 5, Building 5, Chaoshangcheng Community, Panlongcheng, Huangpi District, Wuhan, china

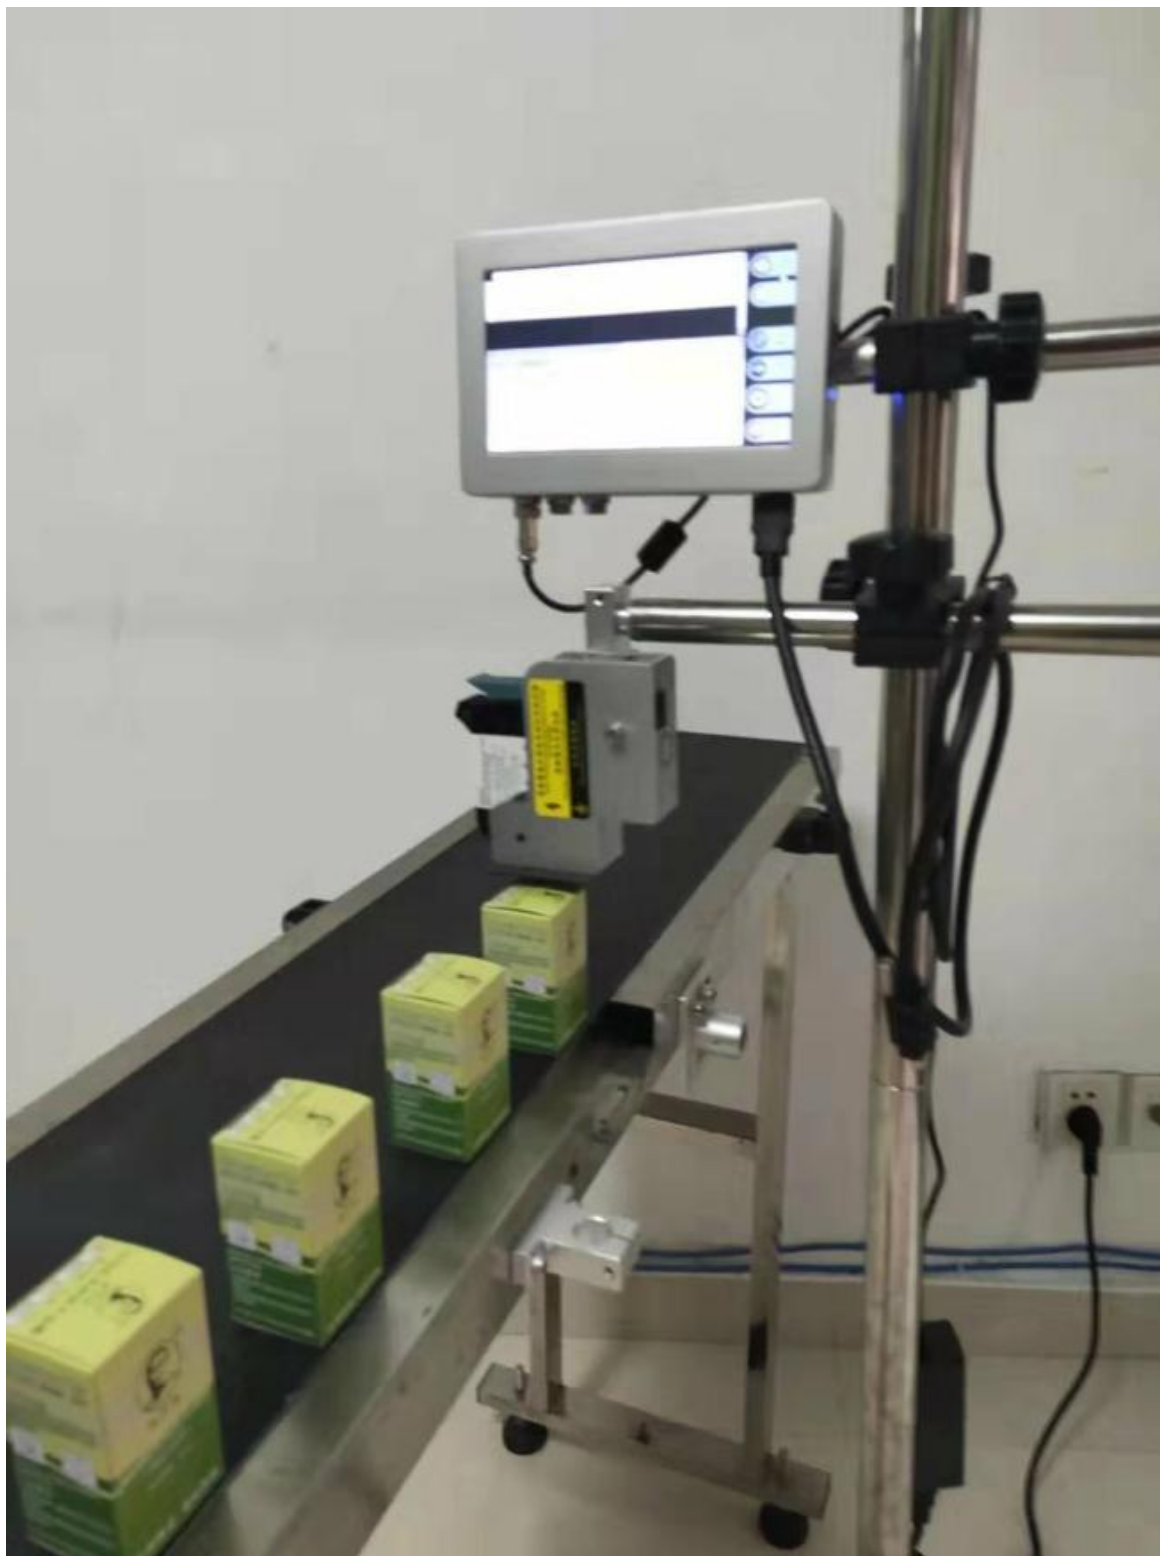

6. Samples Photo

# BANGLEMARK

Wuhan BangleMark Technology Co., Ltd.

Add: Floor 5, Building 5, Chaoshangcheng Community, Panlongcheng, Huangpi District, Wuhan, china

